



# komax

# MIRA 32

The Mira 32 electric wire stripper is the ideal entry-level model for semi-automated wire processing when hand tools no longer meet the requirements. It is designed for wires that are used in the automotive and industrial sectors and can be stripped with V-blades. The machine with setting dials can process leads with up to 4 mm outer diameter and 25 mm strip length. Single-conductor wires and inner wires of multi-core cables can be processed with full or partial stripping.

#### Versatile uses

- Suitable for single-conductor wires and inner wires of multi-core cables with outer diameter up to 4 mm, respectively 3.3 mm<sup>2</sup> / AWG 12
- Strip length up to 25 mm
- Short breakout length of 14 mm, 11 mm on request
- Universal V-blades without blade change

#### Simple operation

- Automatic trigger via sensor
- Three dials for easy adjustment
- Large LED display of the incision diameter with 0.01 mm resolution

#### Compact and mobile

- Electric drive for versatile use
- Ergonomic carry handle for easy transport







#### Versatile use

The Mira 32 has universal V-blades, making it unnecessary to change blades. Various cross-sections for PVC, PE or PP wires with an outer diameter of up to 4 mm (AWG 12) or 3.3 mm<sup>2</sup> can be processed with a single set of blades.

The machine can perform both full and partial strips and has a minimum breakout length of 14 mm, with thin grippers even 11 mm. It therefore can also strip wires for miniaturized connectors with a very short distance between jacket and crimp.

### Simple operation

It takes only a few minutes to learn how to operate the machine. The cutting diameter, strip length and pull-off length can be adjusted with just three dials. A precise incision diameter can be set thanks to the large LED display with 0.01 mm resolution. Wire processing is automatically started when the wire tip touches the trigger sensor. For flexible and very thin wires, processing can also be triggered by a footoperated switch. If necessary, an optional air jet can be supplied for cleaning.







0

**Robust and mobile** 

With its integrated ergonomic carry handle and compact dimensions, the 4.5 kg machine is easy to transport. All that is needed to operate the Mira 32 is an electrical connection.





Mira 32 – very light and exceptionally handy 02


Dials for easy settings

01

Mira 32 is very comfortable to carry thanks to its ergonomic handle

Ready for use anytime and anywhere thanks to the electrical connection 05

Automatic triggering of wire processing via sensor or foot-operated switch

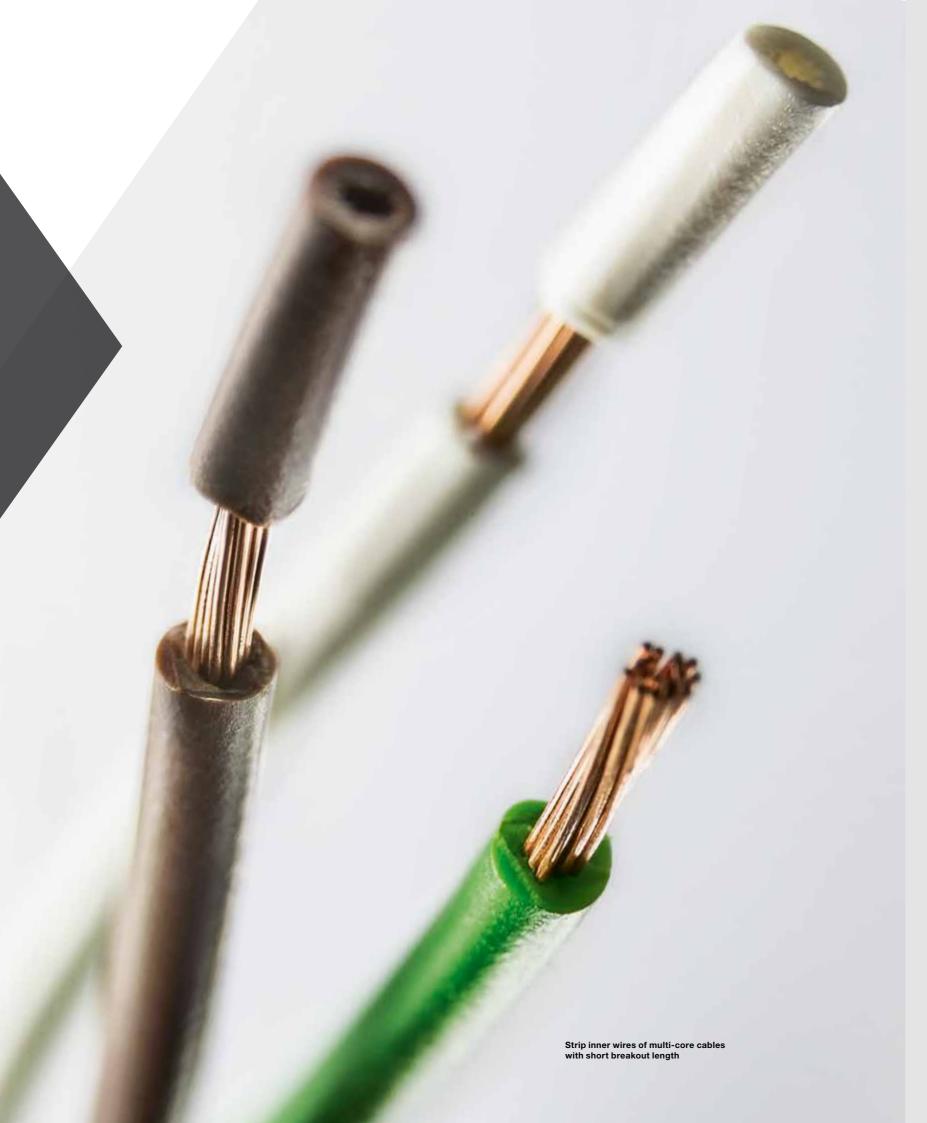

## Processing examples and functions

Full striping

Half stripping

Multi-conductor cables – stripping cores

# Technical data

NG 32 – 12)
– 0.12 in.)
0.16 in.)
1 in.)
1 in.)
n.)
pers: 14 mm (0.55 in.) 11 mm (0.44 in.) preakout length: 6.6 mm (0.26 in.)
ot pedal
stable
40 V AC, 40 VA
n (3.19 × 7.52 × 13.86 in.)
levant CE directives on machine safety ic compatibility.
.10

Conductor cross-section <sup>1</sup>	0.03 – 3.3 mm² (AWG 32 – 12)
Conductor diameter <sup>1</sup>	0.2 – 3 mm (0.008 – 0.12 in.)
Duter diameter <sup>1</sup>	0.6 – 4 mm (0.02 – 0.16 in.)
trip length	1 – 25 mm (0.04 – 1 in.)
ull-off length	2 – 25 mm (0.08 – 1 in.)
esolution of the incision diameter display	0.01 mm (0.0004 in.)
lin. breakout length	With standard grippers: 14 mm (0.55 in.) With thin grippers: 11 mm (0.44 in.) With option short breakout length: 6.6 mm (0.26 in.)
lade type	Universal V-Blade
igger	Sensor, optional foot pedal
ripper force	Mechanically adjustable
vpical cycle time	~ 0.3 s
lectrical connection	50/60 Hz, 100 – 240 V AC, 40 VA
ompressed air connection (air jet for cleaning)	5 – 7 bar
mbient temperature for operation	5 – 40 °C
imensions (W $\times$ H $\times$ D)	81 × 191 × 352 mm (3.19 × 7.52 × 13.86 in.)
/eight	4.5 kg (10 lb.)
E conformity	Conforms to the relevant CE directives on machine safety and electromagnetic compatibility.

that are difficult to process and wires at the limits of the specifications.

## **Options and accessories**

Flat grippers, diamond coated
Flat and thin grippers
Option short breakout-length
Foot pedal switch Mira
Air jet

=

Avoids gripper marks, for ex. for zero-halogen leads
For breakout length up to 11 mm (0.44 in.)
For breakout length up to 6.6 mm (0.26 in.)
Instead of using the cable trigger sensor
For cleaning

### Komax - leading the field now and in the future

As a pioneer and market leader in automated wire processing, Komax provides its customers with innovative solutions. Komax manufactures series and customer-specific machinery, catering to every degree of automation and customization. Its range of quality tools, test systems, and intelligent software and networking solutions complete the portfolio, and ensure safe, flexible, and efficient production.

Komax is a globally active Swiss company with highly qualified employees and development and production facilities on several continents. It provides local support to customers worldwide through its unique sales and service network and offers services that help them get the most out of their investments.

> Komax AG Industriestrasse 6 6036 Dierikon, Switzerland Phone +41 41 455 04 55 sales.din@komaxgroup.com

